

Project: _____

Item No: _____


Quantity: _____

The Matchbox® 1313 Oven



MORE AIR = BETTER QUALITY, FASTER

Patented air flow technology means 3x more air than traditional impingement.

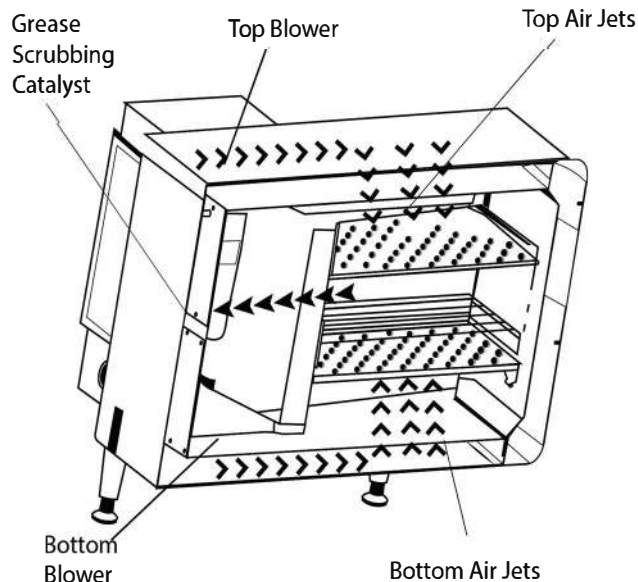

STANDARD FEATURES

- Independently controlled top and bottom blowers w/ speeds up to 567 CFM (ft³/min)
- Quiet work environment – maximum (dB) of 70
- Cool-to-the-touch exterior
- Reduced energy consumption (documentation available)
- Less impact on HVAC costs (documentation available)
- Warranty - 1 year parts and labor
- Precision Impingement™ utilizes hot air for a fast, high-quality cook without microwaves
- FlexTemp technology changes cavity temperature by up to +/- 50°F between cook cycles
- Load and unload food automatically

OPERATION

- Dual touch screen display with security passcode
- Holds up to 1,000 multistage recipes
- USB port – upload and download recipes, view cook logs, diagnostic mode

PERFORMANCE

- Fits up to 12" pizza or a quarter size sheet pan
- Simulates ability to grill, roast, bake, steam, broil, and fry
- Use any oven-safe pans. Specialty pans available

CONSTRUCTION

- 301 stainless steel interior
- 430 stainless steel exterior
- Easy to clean design (filters and jet plates are dishwasher safe)


VENTILATION

- UL listed for operation without a Type 1 hood in accordance with EPA 202 test
- UL listed for multiple stacking configurations
- Performs 10 times better than the required UL grease emissions standard


PROUDLY MADE IN THE USA



The Matchbox® 1313 Oven

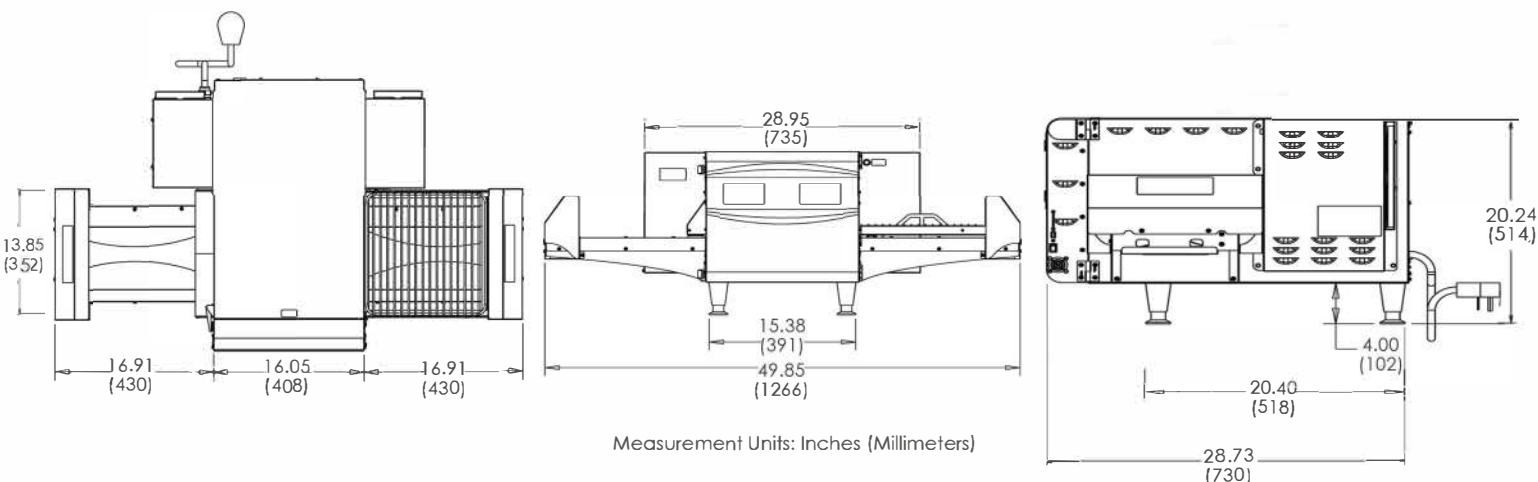

DIMENSIONS		
Height	16.24"	413 mm
With Legs	20.24"	514 mm
Width	49.85"	1267 mm
Depth	28.73"	730 mm
Weight	169 lbs.	77 kg
Minimum Clearance	0" Top	0 mm Top
	2" Back	51 mm Back
	0" Side	0 mm Side
OVEN CAVITY DIMENSIONS		
Height	3.5"	89 mm
Width	13"	330 mm
Depth	13"	330 mm

ELECTRICAL SPECIFICATIONS		
Temperature Range	82-525°F	28-274°C
Voltage	208/240 VAC	 NEMA 6-30
Watts	6.96 kW	
Amperage	26/29 Amp	
Phase	1 ph	
Frequency	60Hz	
Cord Length	72"	1829 mm
SHIPPING SIZE		
Cube (L x W x H)	55" x 34" x 30"	1400mmx860mmx762mm
Shipping Weight	233 lbs.	106 kg
Freight Class	125	
FOB	Sturgeon Bay, Wisconsin, USA	

*If units are stacked, 6" (152 mm) back clearance needed

PROUDLY MADE IN THE USA