
## **GLASSWASHER S050 DIGIT 2**







## STANDARD FEATURES

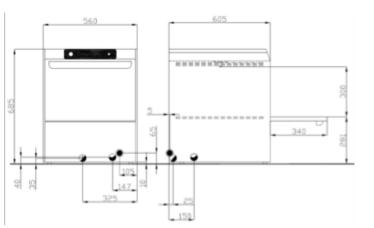

Elecrical connection

O Cold water inlet Hot water inlet

- Double-skinned cabinet and door.
- Wash pump fixed directly to the tank.
- Easy-clean-filter system.
- Two stainless-steel wash arms and two rinse arms of composite material, independent and rotary.
- Tank and door made of stainless steel AISI 304.
- Adjustable rinse aid dosing unit.
- Micro security door.
- Four purpose-designed washing cycles for various types of crockery to be washed.
- Pressed basket guides in the tank.

## **TECHNICAL FEATURES**

Digital control panel (DIGIT)	(sec.)	Baskets/h
Washing Cycle P1 * (42" washing – 5" pause – 13" rinse)	60	60
Washing Cycle P2 * (102" washing – 5" pause – 13" rinse)	120	30
Washing Cycle P3 * (162" washing – 5" pause – 13" rinse)	180	20
Washing Cycle P4 * (462" washing – 5" pause – 13" rinse)	480	7
Basket size	500 x 500 mm	
Wash pump power/capacity	0,27 kW / 137 l/min.	
Element power: tank/boiler	1,6 kW / 2,8 kW	
Water supply temperature/pressure/hardness	max. 55°C / 200-400 kPa / min. 7 max. 12°f **	
Washing/Rinsing temperature	55°C / 85°C	
Capacity: tank/boiler/water consumption per cycle	20 l / 3.5 l / 2,4 l	
Sound emission dB (A)	48	
Total power/Voltage	3,07 kW / 230 Volt 1 ~50 Hz	

<sup>\*</sup>Theoretical data with water supply at 50°, P1 cycle for light-dirty dishes
\*\* Where water hardness exceeds 12°f or 100ppm a water softener is required. Water softener is not suitable for hot water above 30°C.

# **GLASSWASHER S050 DIGIT 2**



### **ACCESSORISES**

Baskets 2 universal baskets, 1 cutlery rack

Hoses (1 for each) Water connection, drain, transparent rinsing product

#### **OPTIONL ADD-ONS**

- Peristaltic detergent dosing unit (PD) identified by a red hose.
- Peristaltic rinse dosing unit (PB).
- Integrated drain pump (PS).

- Water softener included (A).
- Stainless-steel rinse impeller (RI).
- Cold water during cycle.